

FieldSmart Fiber Delivery Point (FDP)

FTTH Drop Cable Assemblies



Application

Your customers deserve the same quality of connection as the central office and the OSP. Clearfield has you covered here, too. Our fiber Drop Cable Assemblies are designed to connect the fiber access point (hand hole, pedestal or aerial) to the ONT on the home in a FTTH network.

Description


Clearfield's proven Ruggedized Drop Cable solutions include HFOC, Ruggedized Flat Drop, and Ruggedized Pigtail for splicing.

Features & Benefits

- Flat drop cable construction can be pulled through conduit, direct buried, or aerially lashed
- All-dielectric construction allows deployment near power lines on utility poles
- For splicing pigtails to drop cable applications, jacket material uses rugged construction to remain flexible and resist sagging at all temperatures
- Toneable cables allow for traceability
- Hybrid configurations available
- Custom length



HFOC Drop Cable

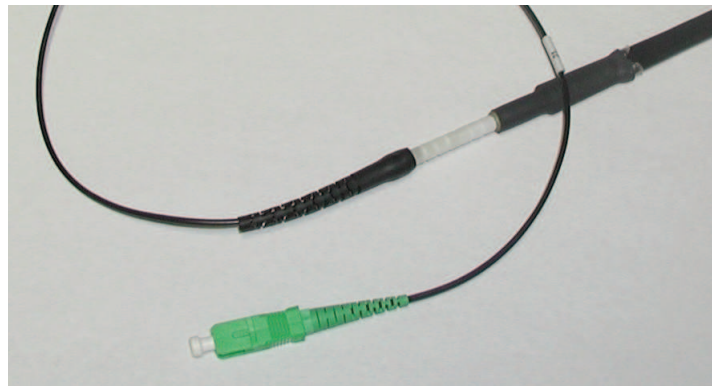

Ruggedized Drop Cable

Ordering Guide

| | | | | | | |
|--|---|--|--|--|---|--|
| H <u> </u> 1 - 0 0 1 - <u> </u> <u> </u> - <u> </u> <u> </u> <u> </u> <u> </u> XXXM or XXXF | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 1 Select cable E - OSP, non-toneable, non-rated M - OSP, toneable, non-rated | 2 Select Connector # 1 A = SC UPC C = SC APC E = LC UPC G = LC APC V = HFOC SC UPC W = HFOC SC APC | 3 Select breakout # 1 C = 0.5 meter Z = Use if a HFOC | 4 Select upjacketing # 1 B = 2mm ruggedized Z = Use if a HFOC | 5 Select Connector # 2 A = SC UPC C = SC APC E = LC UPC G = LC APC V = HFOC SC UPC W = HFOC SC APC Z = Pigtail | 6 Select breakout # 2 C = 0.5 meter Z = Use if a HFOC or pigtail | 7 Select upjacketing # 2 B = 2mm ruggedized Z = Use if a HFOC or pigtail XXXM or XXXF XXXF = Length of assembly in feet XXXM = Length of assembly in meters |

ACCESS